


DEVELOPER SERIES - DEV 581K
TWO BEDROOM, STUDY, TWO BATH - 1818 SQ. FT.

W-64 W-64
 Std. Box-Bay Window

PIER NO.	PIER CAPACITY (LBS.)	FOOTING SIZE REQUIRED (SQ. IN.)		PIER NO.	PIER CAPACITY (LBS.)	FOOTING SIZE REQUIRED (SQ. IN.)		PIER NO.	PIER CAPACITY (LBS.)	FOOTING SIZE REQUIRED (SQ. IN.)		PIER NO.	PIER CAPACITY (LBS.)	FOOTING SIZE REQUIRED (SQ. IN.)	
		1000 PSF	1500 PSF			2000 PSF	1000 PSF			1500 PSF	2000 PSF			1000 PSF	1500 PSF
1	2000	288	192	4	4000	576	384	5	6000	864	576	7	10000	1440	960
2	2500	360	240	3	5000	720	480	6	8000	1152	768	8	12000	1728	1152

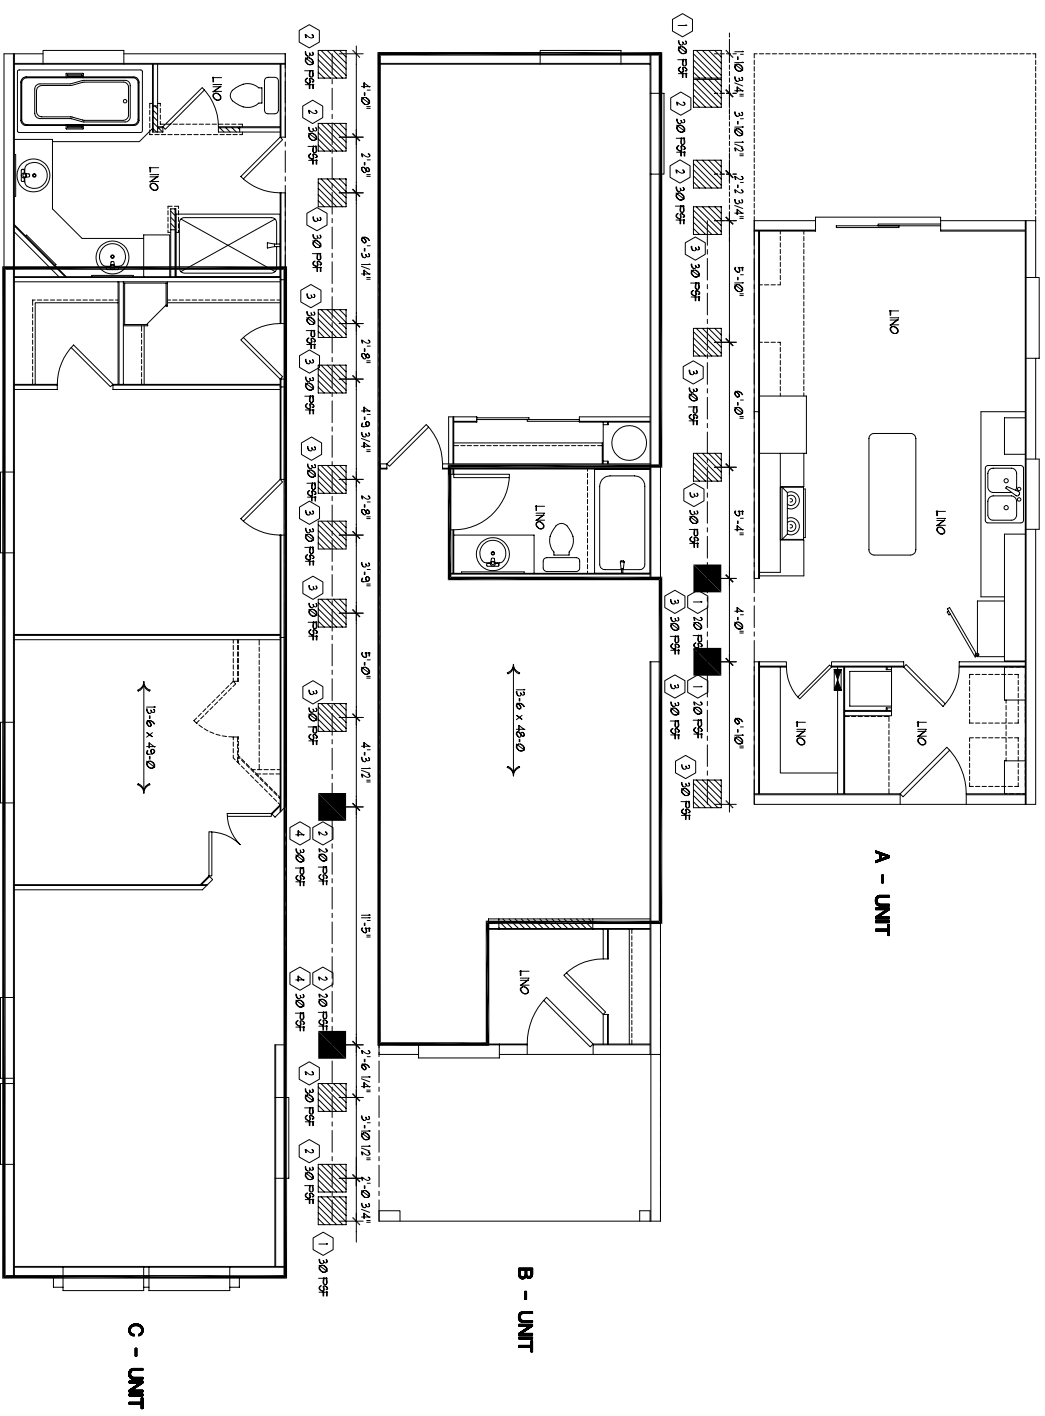

13'-6" CARPET LAYOUT

STANDARD CARPET

- LIVING ROOM
- DINING ROOM
- MASTER BEDROOM
- MASTER BATH
- BEDROOM #2
- STUDY
-
-
- TOTAL 104'-0"

OPTIONAL CARPET

- BREAKFAST ROOM 10'-0"
- GUEST BATH
-
-
-
-
-
-
-
-

- (BEARING WALLS)
- (CLEAR SPAN)

GOLDEN WEST HOMES
 ALBANY DIVISION
 2445 S.W. PACIFIC BLVD.
 ALBANY, OR 97321
 (503) 826-8551 Phone
 (503) 826-5552 Fax




DRAWING TITLE
CARPET & PIER LOC.

ORIGINAL DRAWING BY: G. LUND

SIDEWALL: 4" OR 6"

6" WALLS

PRODUCT DEVELOPER SERIES	MODEL NO. DEV 58K-07
SQ. FT. 1,818	DATE 11-29-06
SHEET 1-A2	REVISED -

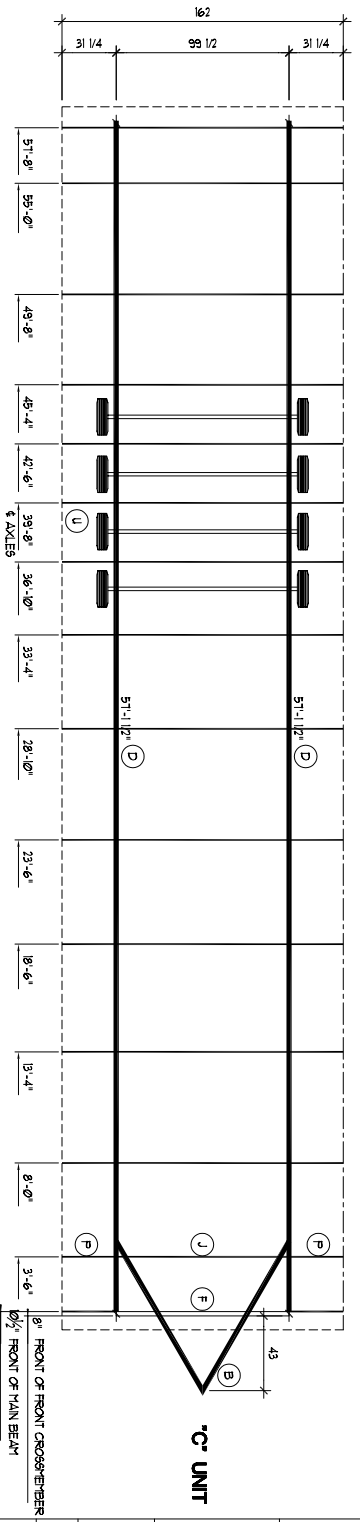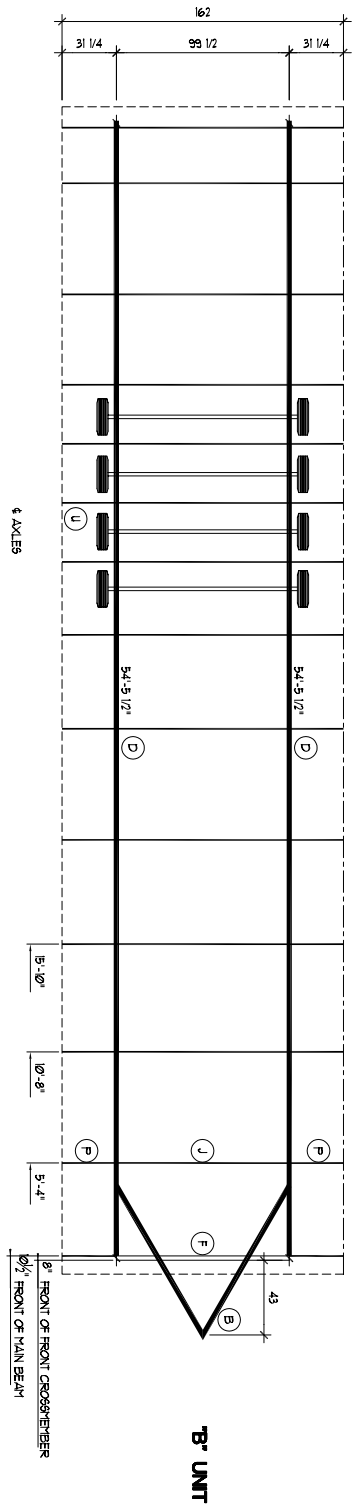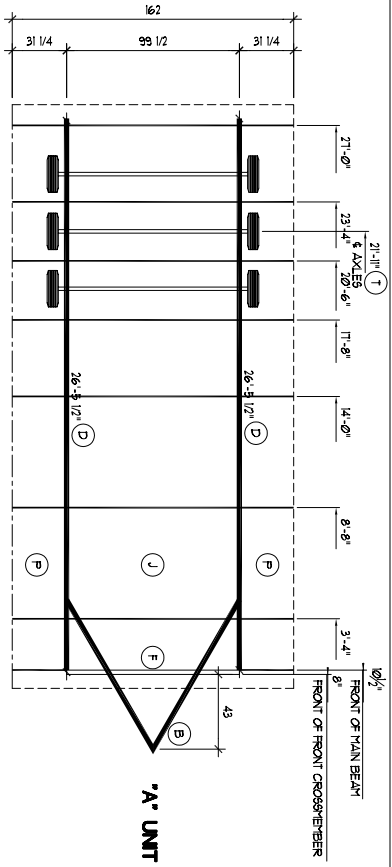


EXTEND CHASSIS W/ OPT COVERED PORCH

LEGEND

- A. MAIN BEAM - 10" X 12 B/W
- B. MAIN BEAM - 10" X 12 B/W
- C. MAIN BEAM - 10" X 12 B/W
- D. MAIN BEAM - 10" X 12 B/W
- E. FRONT CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- F. FRONT CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- G. FRONT CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- H. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- I. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- J. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- K. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- L. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- M. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- N. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- O. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- P. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- Q. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- R. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- S. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- T. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- U. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- V. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- W. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- X. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- Y. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES
- Z. CROSS-MEMBER - 1 1/2" X 8" X 8'-0" W/ 2" W/ES

NOTES:
 1. CHASSIS AND FITCH DETAILS PER STRUCT. DMG 92.00
 2. FLOOR OVERHANG DETAIL PER STRUCT. DMG 93.02.8



GOLDEN WEST HOMES
 ALBANY DIVISION
 2445 S.W. PACIFIC BLVD.
 ALBANY, OR 97321
 (503) 826-8551 Phone
 (800) 858-5852 Fax

DRAWING TITLE: **INSET CHASSIS PLAN**

ORIGINAL DRAWING BY: G. LUND

SIDEWALL: 4" OR 6" **6" WALLS**

PRODUCT: **DEV 58K-07**

DEVELOPER SERIES: **1-29-06**


DATE: **11-29-06**

MODEL NO.: **1-29-06**

SQ. FT.: **1,818**

SHEET: **1-A5-A**

REVISED: **7-24-08 GL**

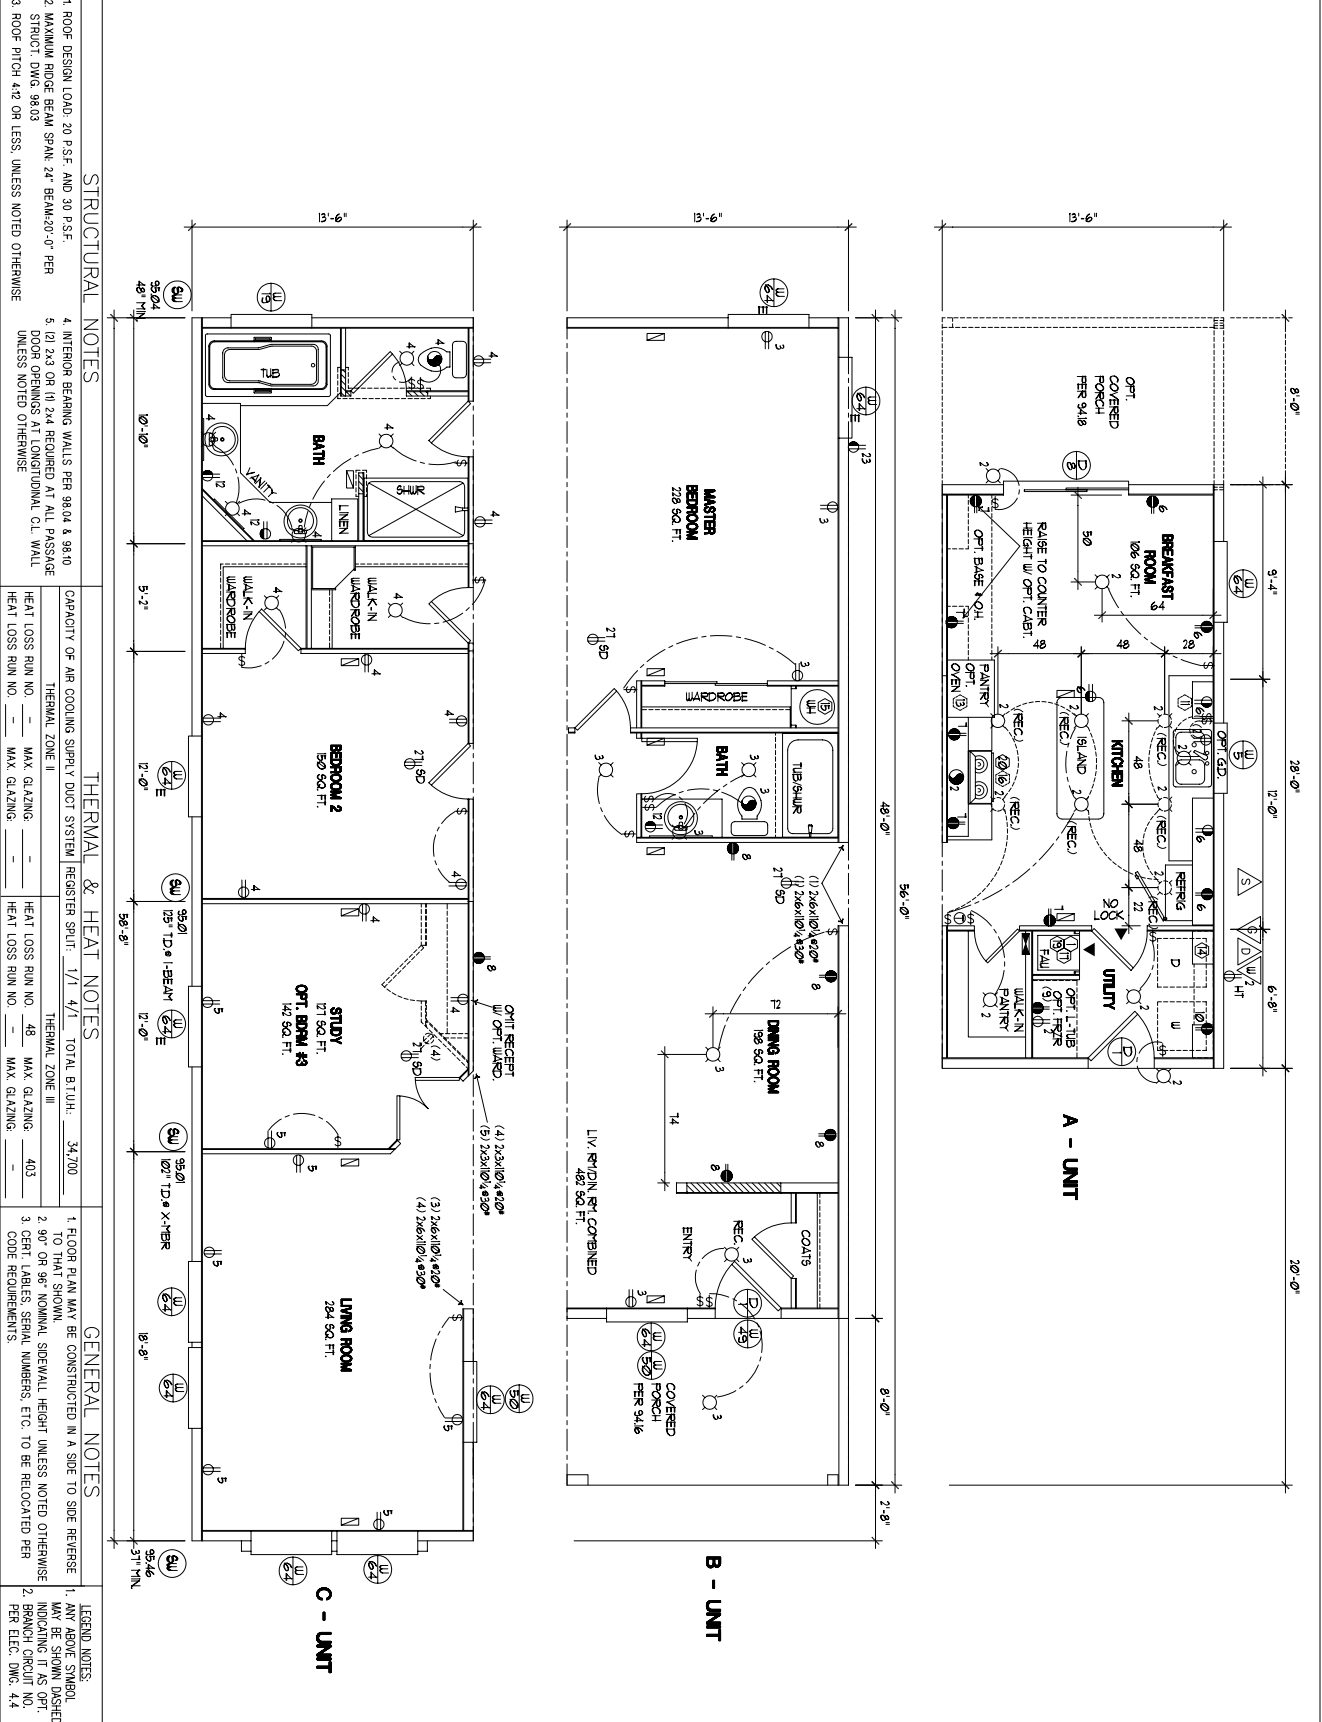

1. ROOF DESIGN LOAD: 20 P.S.F. AND 30 P.S.F.
 2. MAXIMUM RIDGE BEAM SPAN: 24' BEAM: 20'-0" PER STRUCT. DWG. 98.03
 3. ROOF PITCH: 4:12 OR LESS, UNLESS NOTED OTHERWISE

STRUCTURAL NOTES

4. INTERIOR BEARING WALLS PER 98.04 & 98.10
 5. (I) 2x3 OR (II) 2x4 REQUIRED AT ALL PASSAGE DOOR OPENINGS AT LONGITUDINAL CL. WALL UNLESS NOTED OTHERWISE

THERMAL & HEAT NOTES

CAPACITY OF AIR COOLING SUPPLY DUCT SYSTEM REGISTER SPLIT: 1/1, 4/1, TOTAL BTU/H: 34,700
 THERMAL ZONE I
 THERMAL ZONE II
 THERMAL ZONE III

HEAT LOSS RUN NO. — MAX. GLAZING: —
 HEAT LOSS RUN NO. 48 MAX. GLAZING: 403
 HEAT LOSS RUN NO. — MAX. GLAZING: —

GENERAL NOTES

1. FLOOR PLAN MAY BE CONSTRUCTED IN A SUE TO SUE REVERSE TO THAT SHOWN
 2. 90° OR 96° NOMINAL SIDEWALL HEIGHT UNLESS NOTED OTHERWISE
 3. CERT. LABELS, SERIAL NUMBERS, ETC. TO BE RELOCATED PER CODE REQUIREMENTS.

LEGEND NOTES

1. ANY ABOVE SYMBOLS NOTED INDICATING IT AS OPT. BRANCH CIRCUIT NO. PER DEC. DWG. 4.4

GOLDEN WEST HOMES
 ALBANY DIVISION
 2445 S.W. PACIFIC BLVD.
 ALBANY, OR 97321
 (503) 858-5851 Phone
 (503) 858-5852 Fax

ELECTRICAL PLAN

ORIGINAL DRAWING BY: G. LUND

PRODUCT DEVELOPER SERIES: 1,818
 MODEL NO. DATE: DEV 58K-07 11-29-06

SHEET 1-A3 REVISED 7-24-08 GL

LEGEND

(SW)	SHEAR WALL	(P)	15 AMP RECEPTACLE
(W)	WIND PER DOOR SCHED.	(P)	20 AMP RECEPTACLE
(W)	WATER INLET	(S)	WALL SWITCH
(W)	CAS INLET	(HT)	HEAT TAPE RECEPTACLE
(S)	SEWER OUTLET	(SD)	SMOKE DETECTOR (WALL OR CEILING)
(D)	DRYER VENT	(GD)	CARBIDE DISPOSAL
(E)	EGRESS WINDOW	(P)	GR RECEPTACLE (15 OR 20 AMP)
(#)	OPTION CIRCUIT (INFO. PER DWG. 4.4)	(P)	GR RECEPTACLE (20 AMP)
(L)	NONDIMENSIONAL LIGHT	(P)	20"x16" RETURN AIR GRILL - DOWNFLOW
(E)	EXHAUST FAN	(P)	4"x10" AUL - FLOOR REGISTER DOWNFLOW
(E)	MAIN ELECTRICAL PANEL BOX	(P)	2"x10" MINIMUM CLEARANCE REQUIRED
(T)	THERMOSTAT LOCATED PER CODE	(P)	FLUORESCENT LIGHT

